



# SEMCO S6000



## Key Features

The SEMCO S6000 is equipped with both development and sampling equipment and comes to the site with a self-contained decon trailer.

- Boom Capacity: 12,000lbs – 2 part line  
Lay Back: 4'
- Boom Capacity: 16,000lbs – 3 part line  
Lay Back: 4'
- Max. Vertical Boom Reach: 35'
- Max. Horizontal Boom Reach: 13'6"


J. & H. Drilling Co., Inc. dba MR Drilling 13124

Firestone Blvd., Santa Fe Springs, CA 90670

Phone (714) 994-0402

Fax (714) 994-0408

Website: [www.mrdrillco.com](http://www.mrdrillco.com)

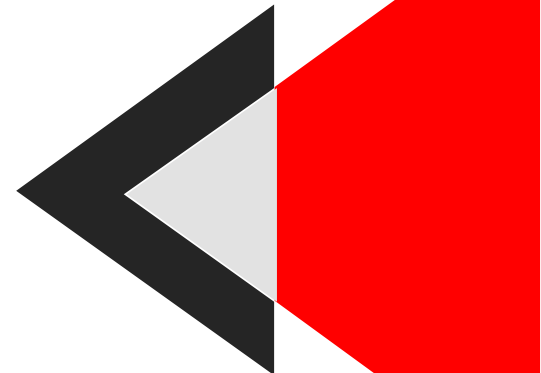



# SEMCO S6000

## Main Winch:

- Capacity: 6,000 lb.. single line
- 12,000 lb.. double line
- 16,000 lbs.. triple line
- Cable: 140 X 7/16 XIPS
- Speed: 120 ft/min.
- Hydraulic Control : Manual

## Sandline Winch with Disk Brake (free fall)

- Capacity: 3000 lb.. single line
- Cable Cap: 1,500' of 3/8" diameter
- Speed: 450 ft/min. (Max.)
- Hydraulic Control : Manual
- Storage: 2 lockable tool boxes 60"
- 2 pipe storage racks w/ Straps

## Options: Direct Mount PTO

- 2 Speed Winch
- 44' Derrick
- Factory Mounting
- Paint Other Than Factory White
- Hydro Breakout Cylinder w/ Valve
- Remote Control-Main Winch
- Cathead w/ Valve
- Auxiliary Hydro Valve
- Paint Other Than Factory White
- Hydro Breakout Cylinder w/ Valve
- Remote Control-Main Winch
- Cathead w/ Valve
- Auxiliary Hydro Valve
- Hydro oil Cooler 12 VDC
- Hydraulic Wire Reel
- Light Kit For Mast
- 78" L Tool Box
- 96" L Tool Box
- Steel Bed w/Deck plate (min)
- Service Body

